

Standardkühler

GR-Serie

Version 2022

KÜHLER-RATH

WILLI RATH KG
Autokühler
Herzogenbuscherstr. 41
D-54292 TRIER


TEL. +49 (0) 651/2 70 76-0
FAX. +49 (0) 651/2 70 76-22
info@kuehler-rath.de
www.kuehler-rath.de

Ölkühler Serie GR

ZUBEHÖR



HALTERFÜßE

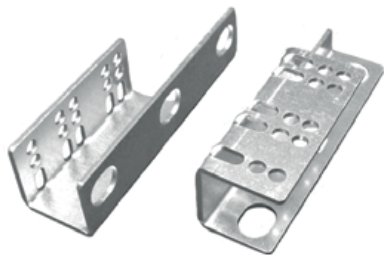

Art.-Nr.: 58996

THERMOSCHALTER



Art.-Nr.: 88451

60 Grad / 50 Grad

Art.-Nr.: 88452

70 Grad / 60 Grad

Art.-Nr.: 88453

50 Grad / 40 Grad

Gewinde:
M22x1,5

ANLAUFKONDENSATOREN



Art.-Nr.: 88456

1,5 μ F

Art.-Nr.: 88457

6 μ F

Art.-Nr.: 88458

8 μ F


Ölkühler Serie GR

Modell GR 50 S



KÜHLER-RATH



Maße in mm

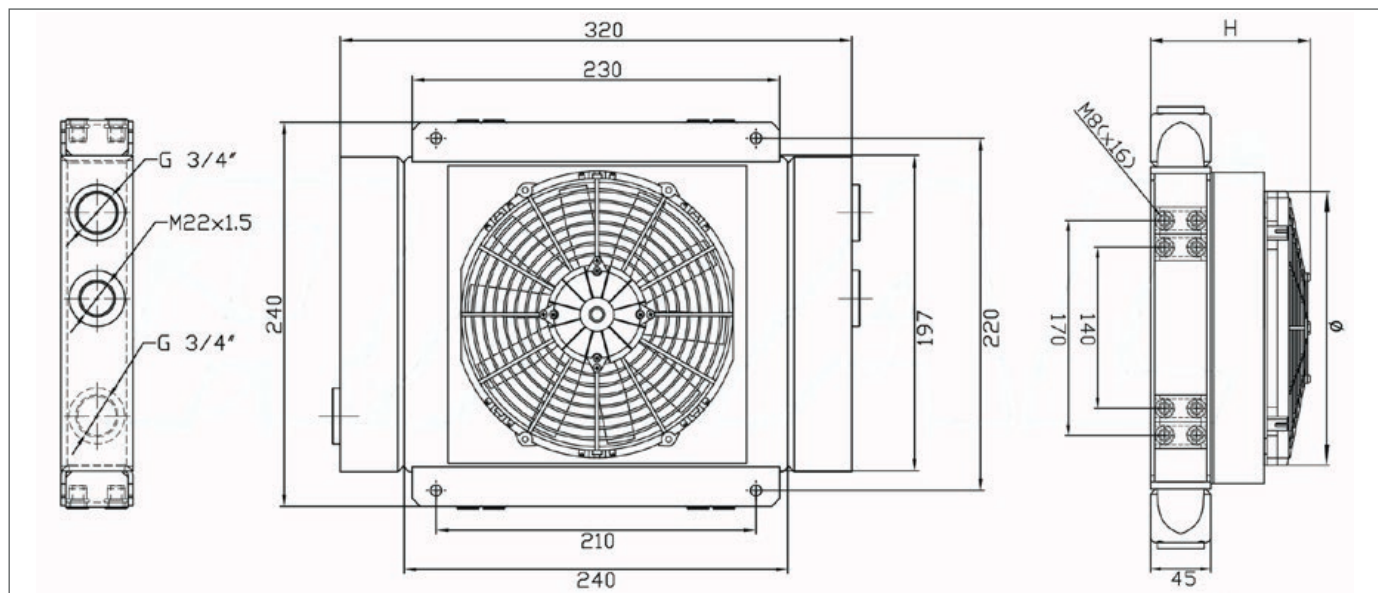

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m³/h):	Volumen I:	Leistungsaufnahme:
86060	nur Ölkühler	45	-	-	-	-
86060Z	12V ziehend	140	190	446	-	6,4 A
86060D	12V drückend	140	190	497	-	6,4 A
860603	24V ziehend	140	190	419	-	2,8 A
860604	24V drückend	140	190	505	-	3,3 A
860601	230V-50/60Hz ziehend	135	200	1025	-	0,34 A
860602	230V-50/60Hz drückend	135	200	1025	-	0,34 A
860605	230/400V-50/60Hz 3FN ziehend	135	200	1020	-	0,13 A
860606	230/400V-50/60Hz 3FN drückend	135	200	1020	-	0,13 A
860607	hydraulisch ziehend	145	195	958	-	0,7 kW
860608	hydraulisch drückend	145	195	958	-	0,7 kW

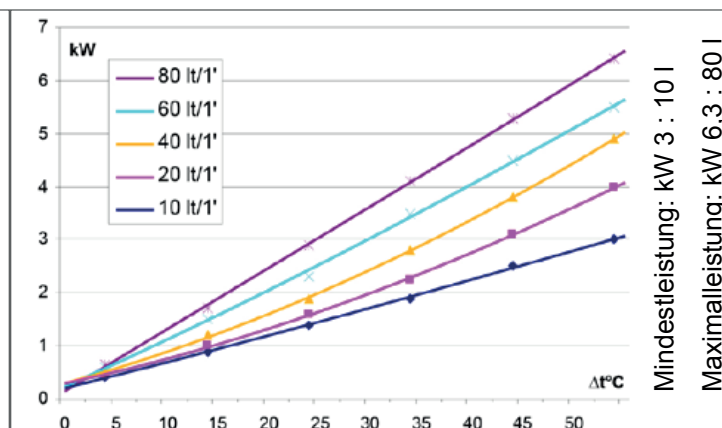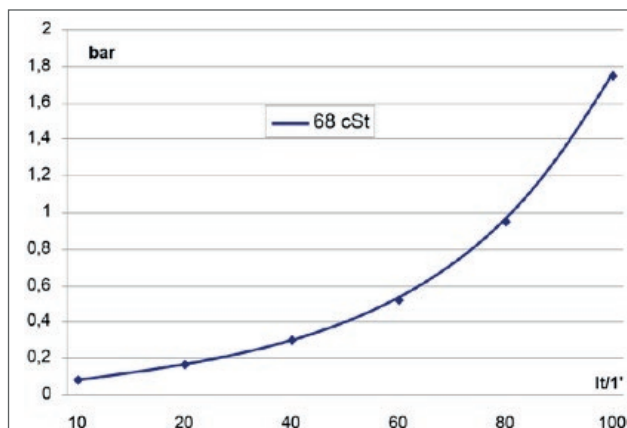


Ölkühler Serie GR



Modell GR 50 D



Maße in mm

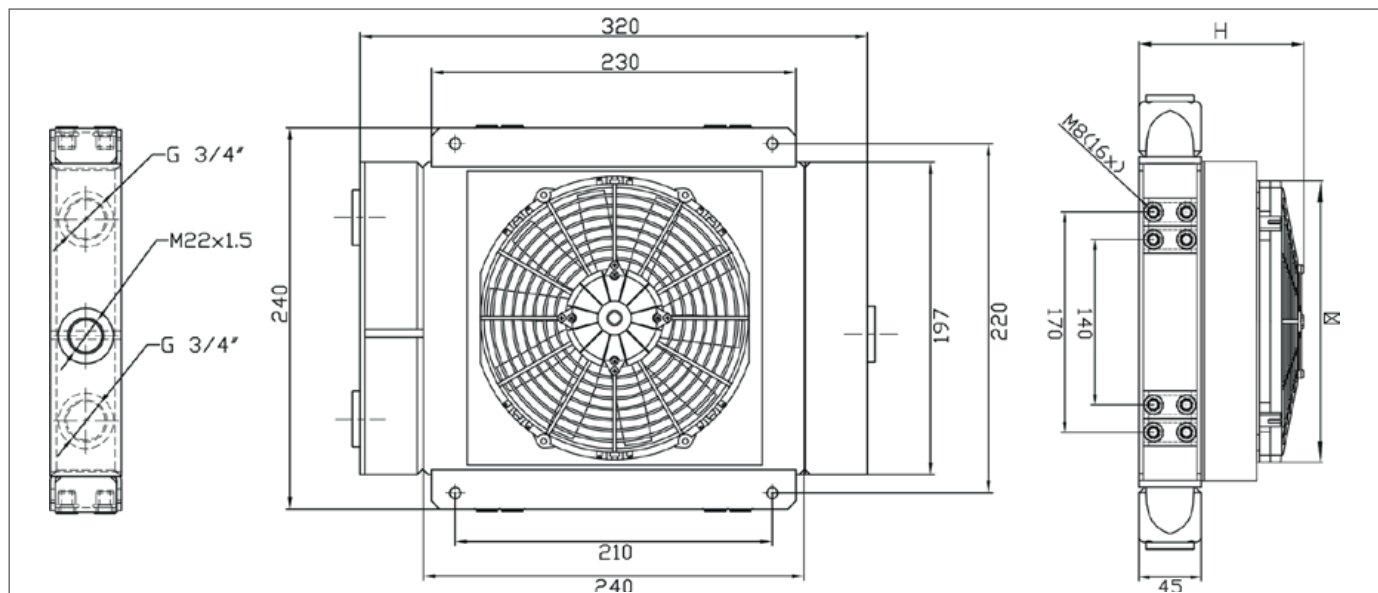

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m³/h):	Volumen l:	Leistungsaufnahme:
86050	nur Ölkühler	45	-	-	-	-
86050Z	12V ziehend	140	190	446	-	6,4 A
86050D	12V drückend	140	190	497	-	6,4 A
860503	24V ziehend	140	190	419	-	2,8 A
860504	24V drückend	140	190	505	-	3,3 A
860501	230V-50/60Hz ziehend	135	200	1025	-	0,34 A
860502	230V-50/60Hz drückend	135	200	1025	-	0,34 A
860505	230/400V-50/60Hz 3FN ziehend	135	200	1020	-	0,13 A
860506	230/400V-50/60Hz 3FN drückend	135	200	1020	-	0,13 A
860507	hydraulisch ziehend	145	195	958	-	0,7 kW
860508	hydraulisch drückend	145	195	958	-	0,7 kW

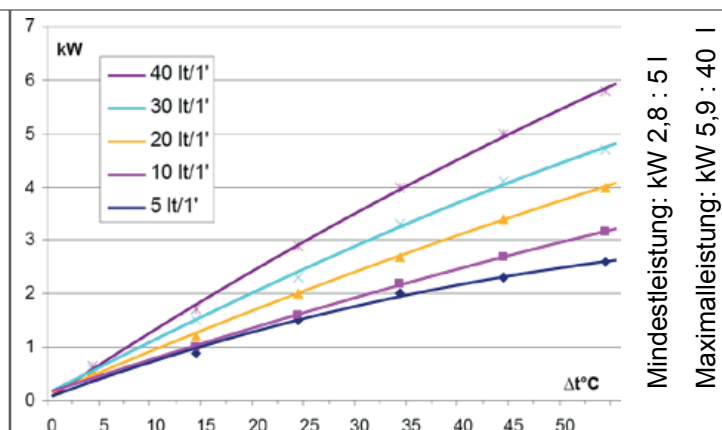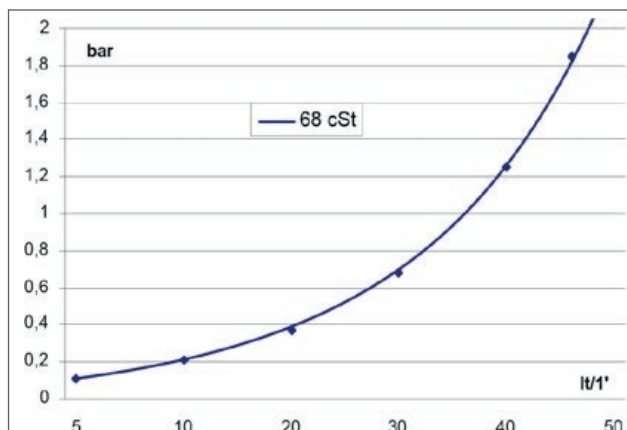


Ölkühler Serie GR



Modell GR 100 S



Maße in mm

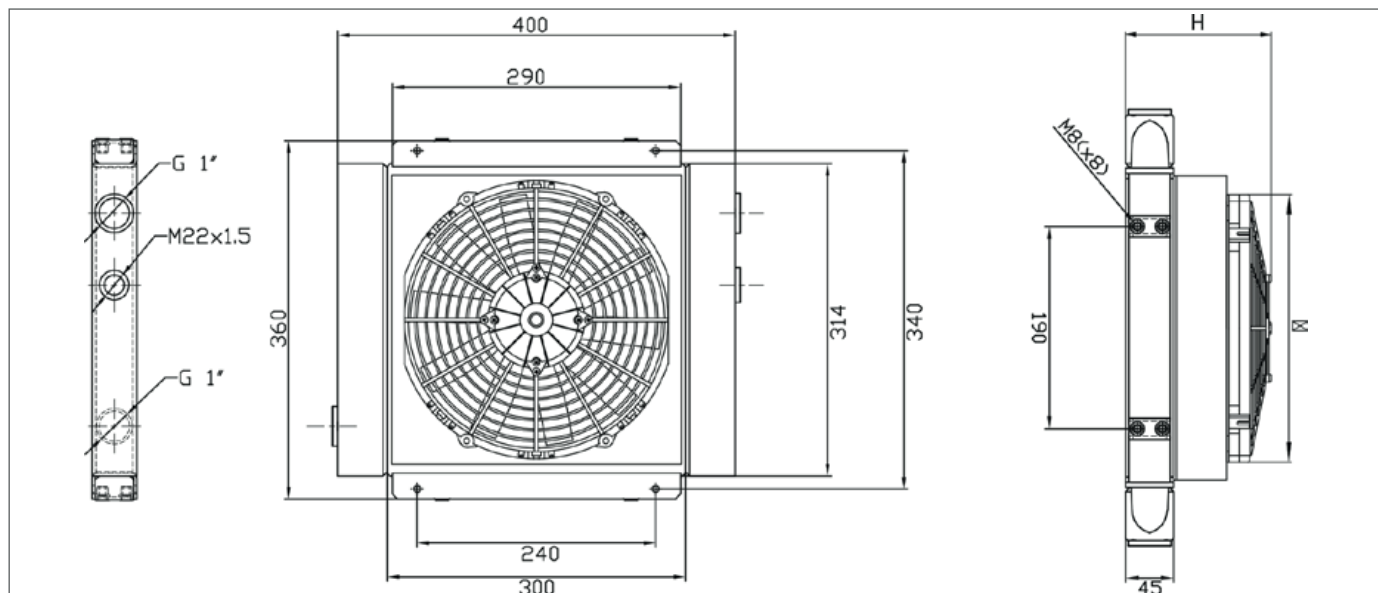

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m³/h):	Volumen I:	Leitungsaufnahme:
86061	nur Ölkühler	45	-	-	-	-
86061Z	12V ziehend	210	305	1839	-	16,5 A
86061D	12V drückend	210	305	1736	-	14,9 A
860613	24V ziehend	210	305	2161	-	10,3 A
860614	24V drückend	210	305	2050	-	9,1 A
860611	230V-50/60Hz ziehend	175	300	3745	-	1,55 A
860612	230V-50/60Hz drückend	175	300	3745	-	1,55 A
860615	230/400V-50/60Hz 3FN ziehend	175	300	3350	-	0,48 A
860616	230/400V-50/60Hz 3FN drückend	175	300	3350	-	0,48 A
860617	hydraulisch ziehend	228	300	3080	-	0,41 kW
860618	hydraulisch drückend	225	300	3080	-	0,41 kW

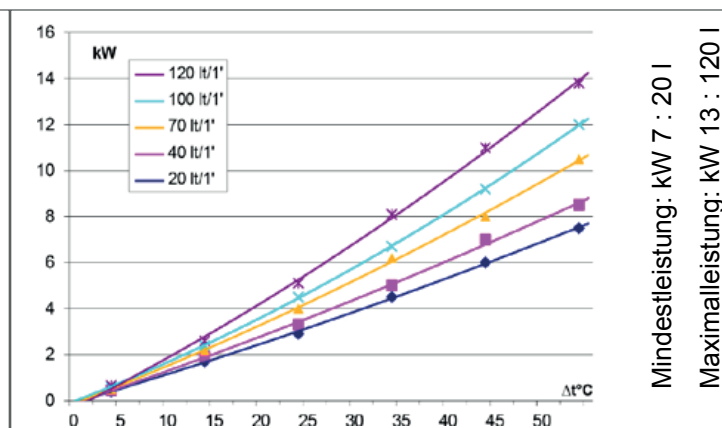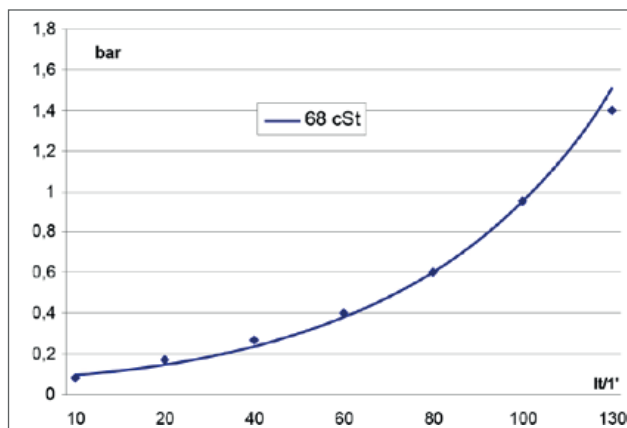

Mindestleistung: kW 7 : 20 l
Maximalleistung: kW 13 : 120 l


Ölkühler Serie GR

Modell GR 100 D



KÜHLER-RATH



Maße in mm

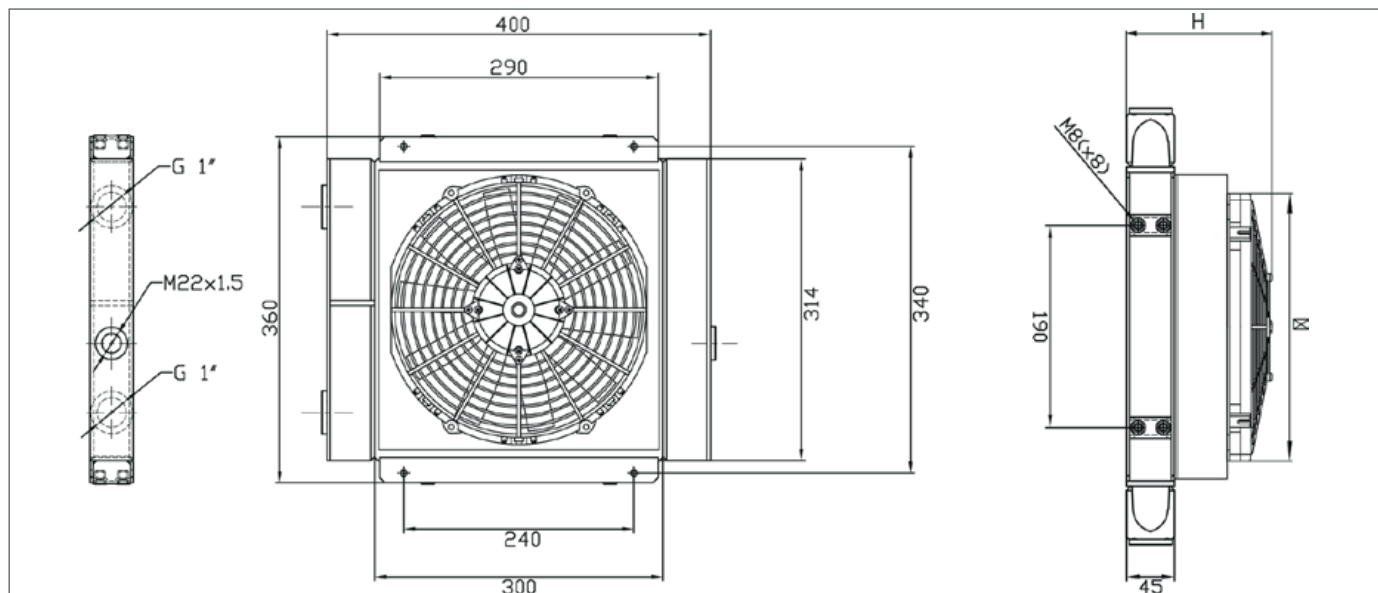

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m ³ /h):	Volumen l:	Leistungsaufnahme:
86051	nur Ölkühler	45	-	-	-	-
86051Z	12V ziehend	210	305	1839	-	16,5 A
86051D	12V drückend	210	305	1736	-	14,9 A
860513	24V ziehend	210	305	2161	-	10,3 A
860514	24V drückend	210	305	2050	-	9,1 A
860511	230V-50/60Hz ziehend	175	300	3745	-	1,55 A
860512	230V-50/60Hz drückend	175	300	3745	-	1,55 A
860515	230/400V-50/60Hz 3FN ziehend	175	300	3350	-	0,48 A
860516	230/400V-50/60Hz 3FN drückend	175	300	3350	-	0,48 A
860517	hydraulisch ziehend	228	300	3080	-	0,41 kW
860518	hydraulisch drückend	225	300	3080	-	0,41 kW

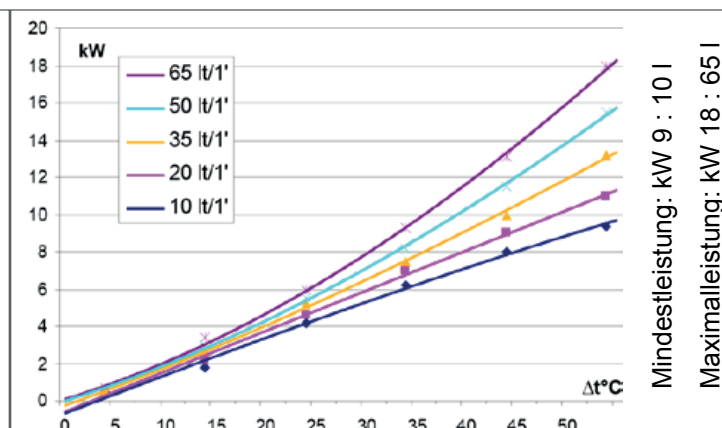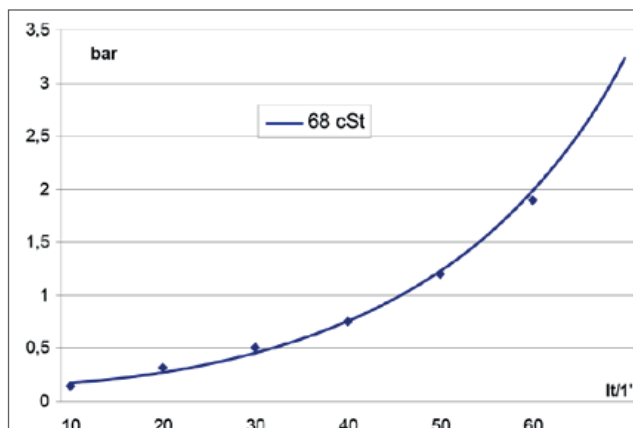


Ölkühler Serie GR

Modell GR 150 S



KÜHLER-RATH



Maße in mm

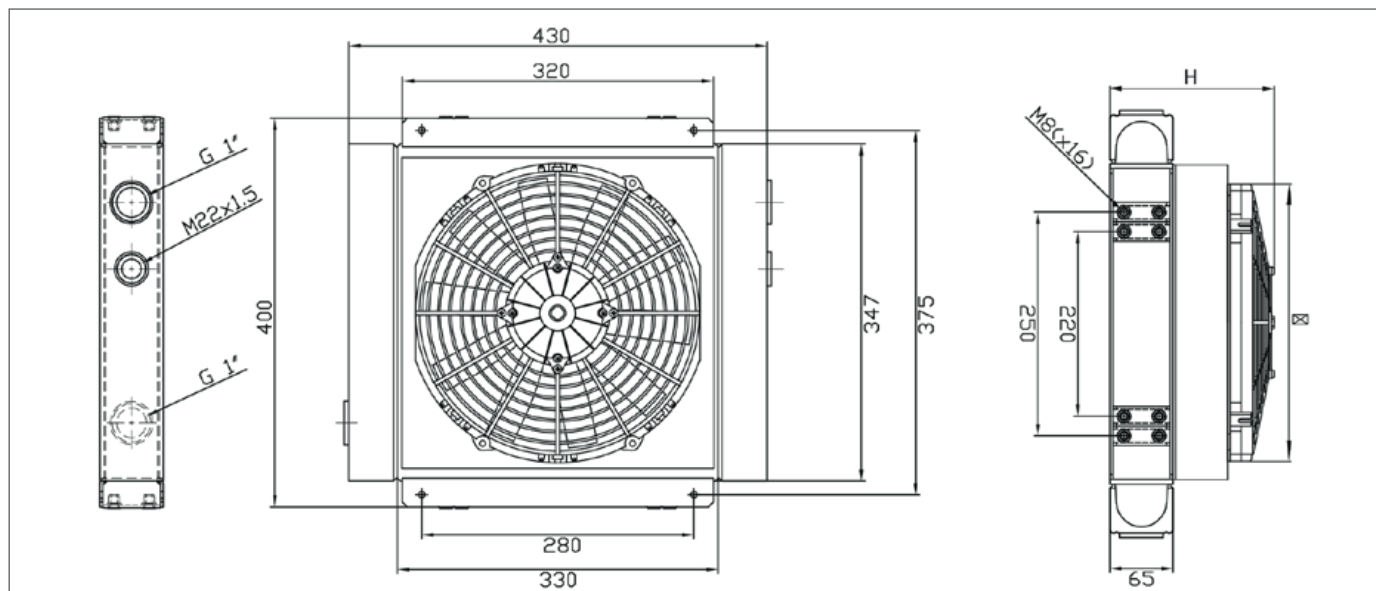

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m³/h):	Volumen l:	Leistungsaufnahme:
86062	nur Ölkühler	65	-	-	-	-
86062Z	12V ziehend	230	305	1839	-	16,5 A
86062D	12V drückend	230	305	1736	-	14,9 A
860623	24V ziehend	230	305	2161	-	10,3 A
860624	24V drückend	230	305	2050	-	9,1 A
860621	230V-50/60Hz ziehend	195	300	3745	-	1,55 A
860622	230V-50/60Hz drückend	195	300	3745	-	1,55 A
860625	230/400V-50/60Hz 3FN ziehend	195	300	3350	-	0,48 A
860626	230/400V-50/60Hz 3FN drückend	195	300	3350	-	0,48 A
860627	hydraulisch ziehend	245	300	3080	-	0,41 kW
860628	hydraulisch drückend	245	300	3080	-	0,41 kW

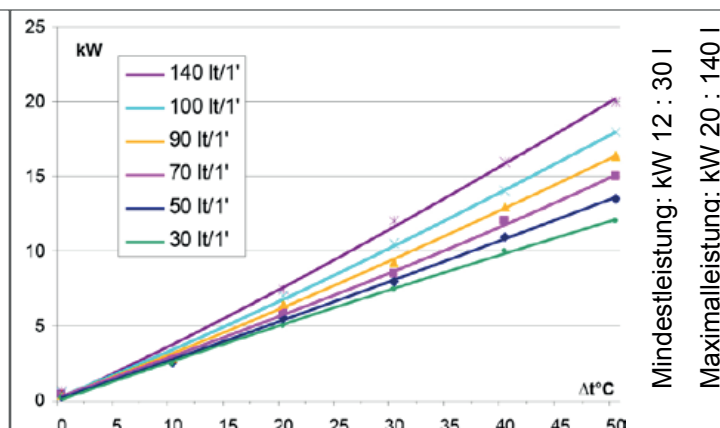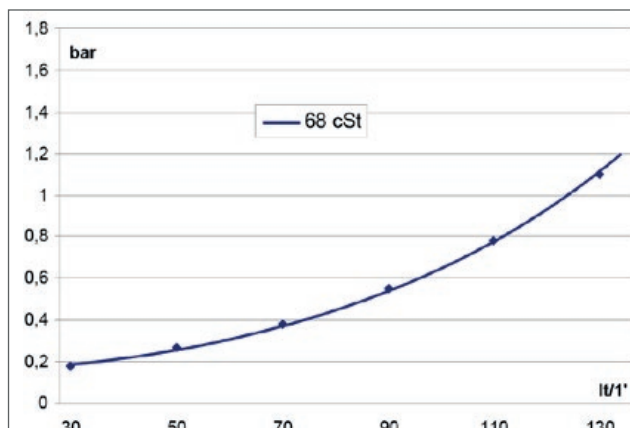


Ölkühler Serie GR

Modell GR 150 D



KÜHLER-RATH



Maße in mm

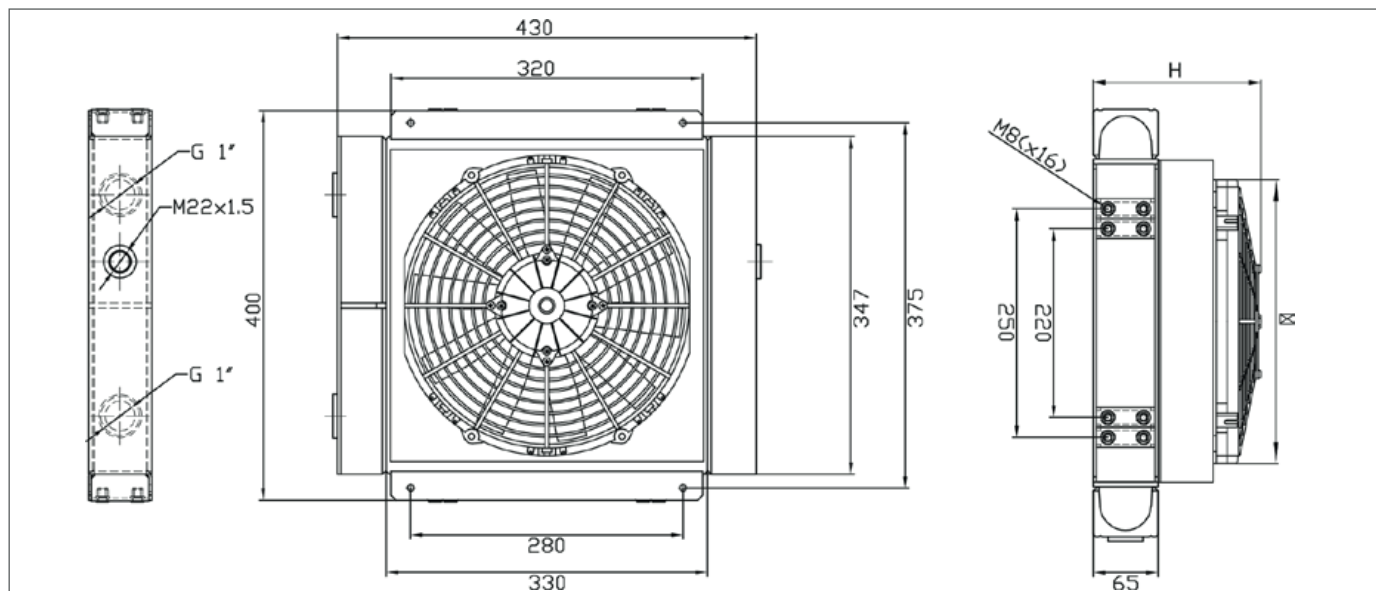

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m³/h):	Volumen I:	Leistungsaufnahme:
86052	nur Ölkühler	65	-	-	-	-
86052Z	12V ziehend	230	305	1839	-	16,5 A
86052D	12V drückend	230	305	1736	-	14,9 A
860523	24V ziehend	230	305	2161	-	10,3 A
860524	24V drückend	230	305	2050	-	9,1 A
860521	230V-50/60Hz ziehend	195	300	3745	-	1,55 A
860522	230V-50/60Hz drückend	195	300	3745	-	1,55 A
860525	230/400V-50/60Hz 3FN ziehend	195	300	3350	-	0,48 A
860526	230/400V-50/60Hz 3FN drückend	195	300	3350	-	0,48 A
860527	hydraulisch ziehend	245	300	3080	-	0,41 kW
860528	hydraulisch drückend	245	300	3080	-	0,41 kW

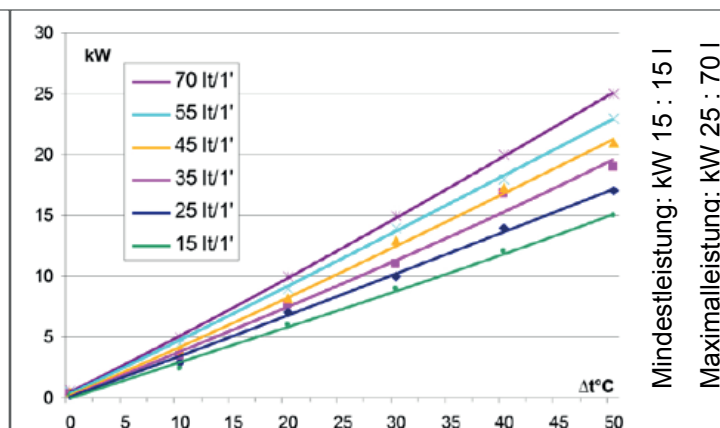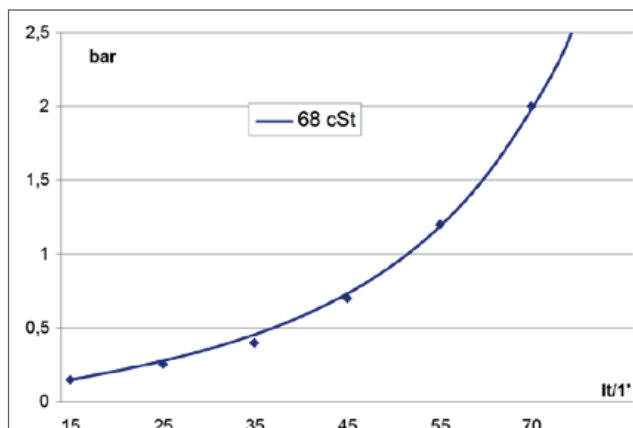


Ölkühler Serie GR

Modell GR 200 S



KÜHLER-RATH



Maße in mm

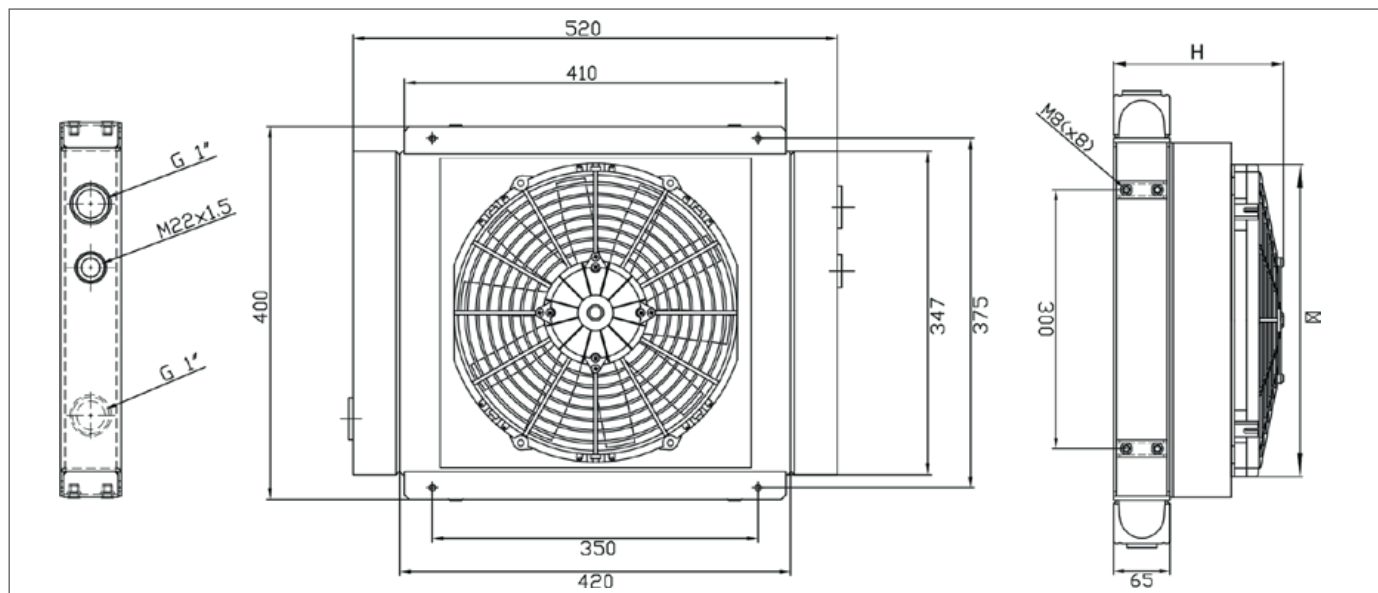

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m ³ /h):	Volumen l:	Leistungsaufnahme:
86064	nur Ölkühler	65	-	-	-	-
86064Z	12V ziehend	230	305	1839	-	16,5 A
86064D	12V drückend	230	305	1736	-	14,9 A
860643	24V ziehend	230	305	2161	-	10,3 A
860644	24V drückend	230	305	2050	-	9,1 A
860641	230V-50/60Hz ziehend	195	300	3745	-	1,55 A
860642	230V-50/60Hz drückend	195	300	3745	-	1,55 A
860645	230/400V-50/60Hz 3FN ziehend	195	300	3350	-	0,48 A
860646	230/400V-50/60Hz 3FN drückend	195	300	3350	-	0,48 A
860647	hydraulisch ziehend	245	300	3080	-	0,41 kW
860648	hydraulisch drückend	245	300	3080	-	0,41 kW

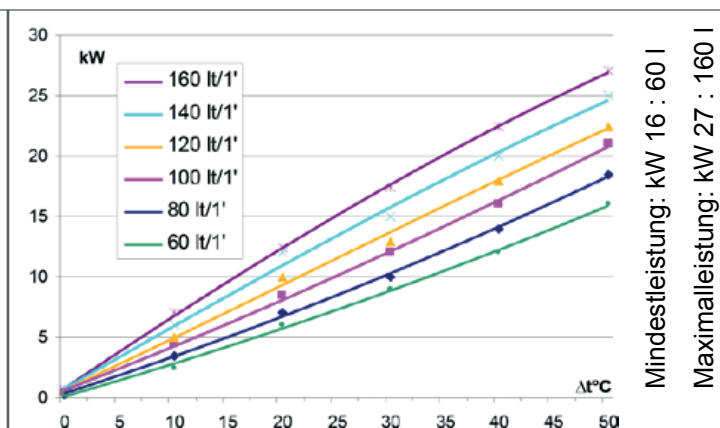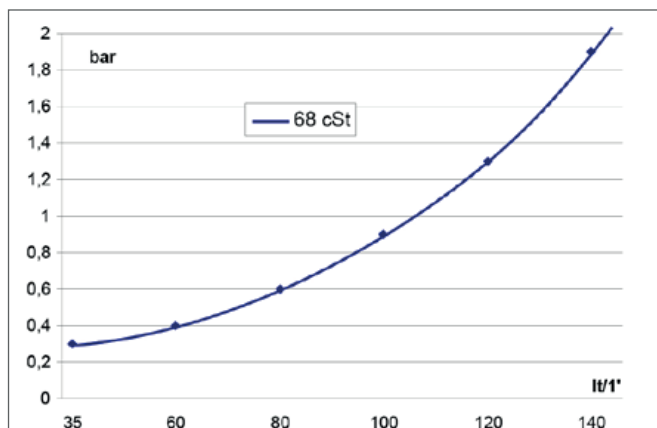


Ölkühler Serie GR

Modell GR 200 D



KÜHLER-RATH



Maße in mm

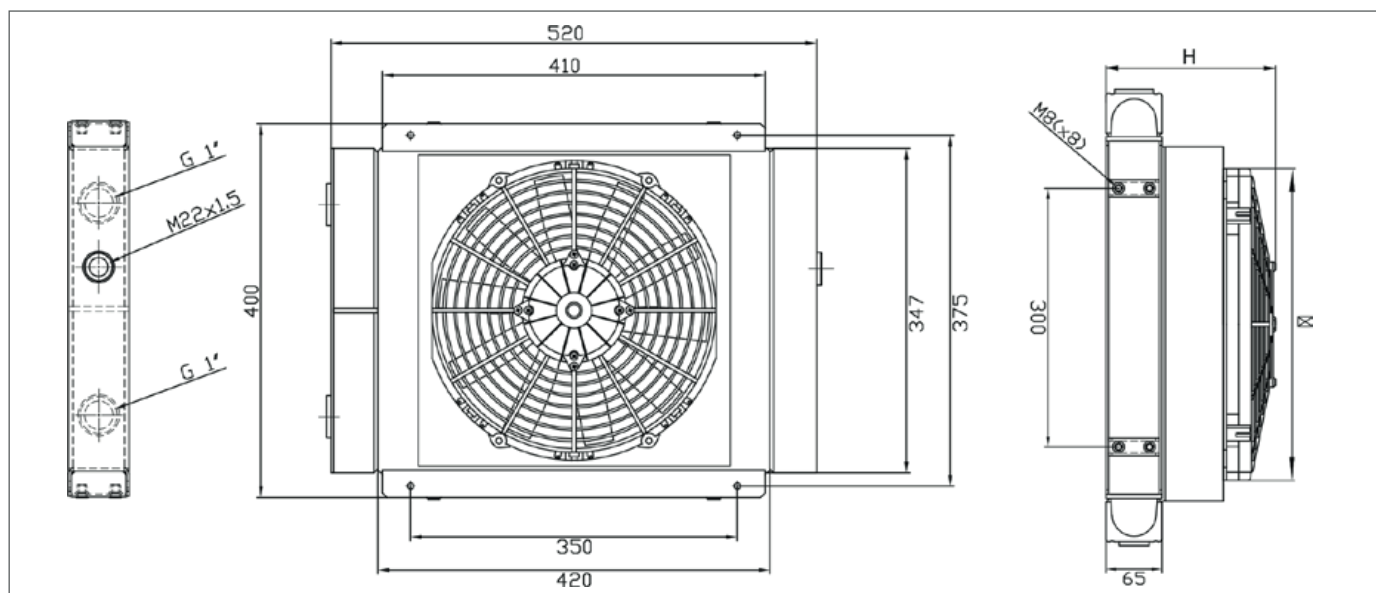

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m³/h):	Volumen I:	Leistungsaufnahme:
86054	nur Ölkühler	65	-	-	-	-
86054Z	12V ziehend	230	305	1839	-	16,5 A
86054D	12V drückend	230	305	1736	-	16,5 A
860543	24V ziehend	230	305	2161	-	10,3 A
860544	24V drückend	230	305	2050	-	9,1 A
860541	230V-50/60Hz ziehend	195	300	3745	-	1,55 A
860542	230V-50/60Hz drückend	195	300	3745	-	1,55 A
860545	230/400V-50/60Hz 3FN ziehend	195	300	3350	-	0,48 A
860546	230/400V-50/60Hz 3FN drückend	195	300	3350	-	0,48 A
860547	hydraulisch ziehend	245	300	3080	-	0,41 kW
860548	hydraulisch drückend	245	300	3080	-	0,41 kW

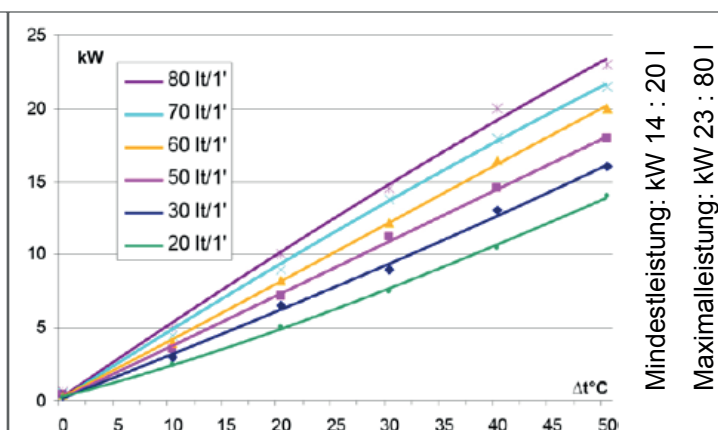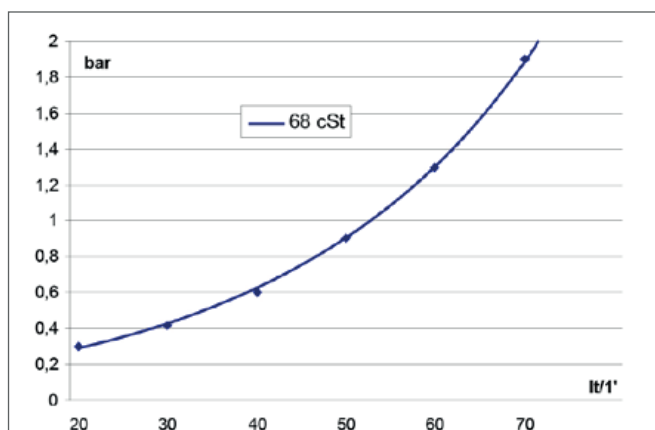


Ölkühler Serie GR



Modell GR 300 S



Maße in mm

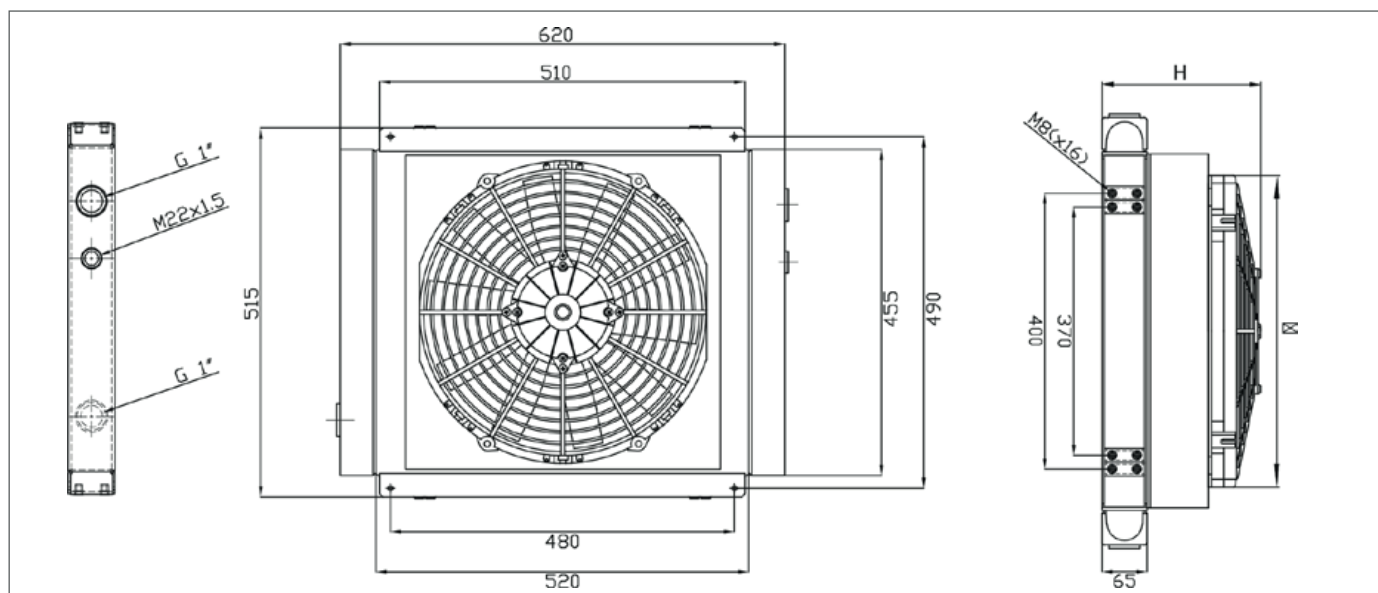

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m³/h):	Volumen I:	Leistungsaufnahme:
86065	nur Ölkühler	65	-	-	-	-
86065Z	12V ziehend	230	385	2212	-	16,0 A
86065D	12V drückend	230	385	2412	-	16,2 A
860653	24V ziehend	230	385	2577	-	9,3 A
860654	24V drückend	230	385	2609	-	9,0 A
860651	230V-50/60Hz ziehend	220	400	4950	-	1,06 A
860652	230V-50/60Hz drückend	220	400	4950	-	1,06 A
860655	230/400V-50/60Hz 3FN ziehend	220	400	4615	-	0,39 A
860656	230/400V-50/60Hz 3FN drückend	220	400	4615	-	0,39 A
860657	hydraulisch ziehend	245	400	7050	-	1,5 kW
860658	hydraulisch drückend	245	400	7050	-	1,5 kW

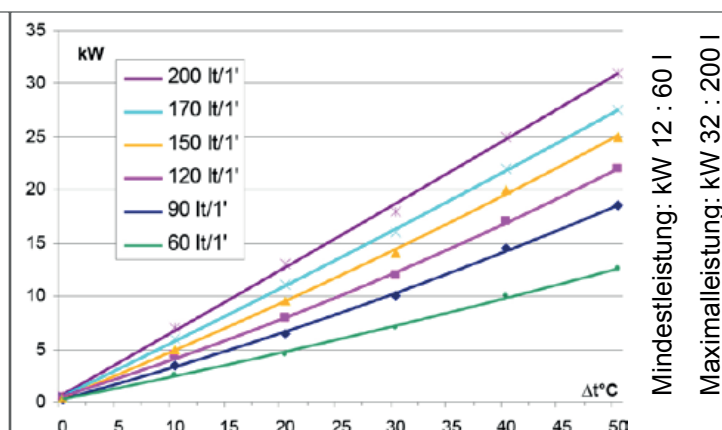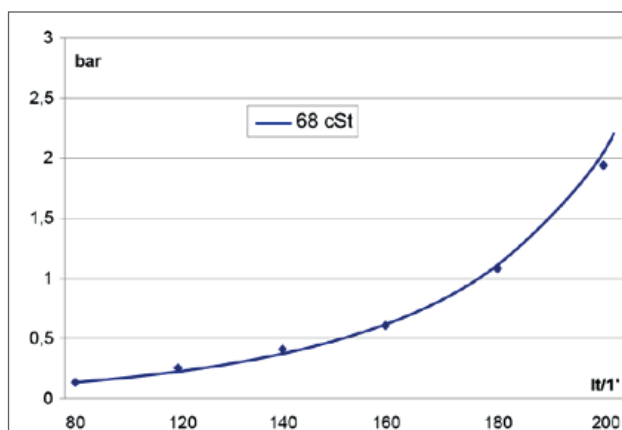


Ölkühler Serie GR

Modell GR 300 D



KÜHLER-RATH



Maße in mm

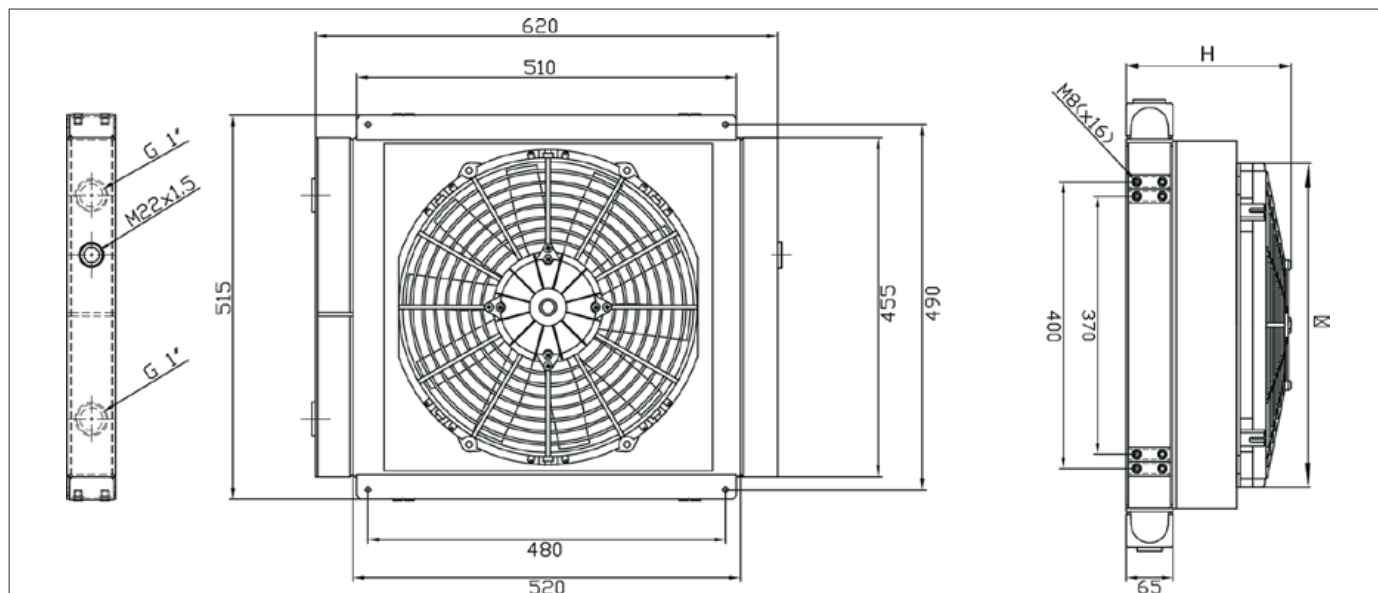

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m³/h):	Volumen l:	Leistungsaufnahme:
86055	nur Ölkühler	65	-	-	-	-
86055Z	12V ziehend	230	385	2212	-	16,0 A
86055D	12V drückend	230	385	2412	-	16,2 A
860553	24V ziehend	230	385	2577	-	9,3 A
860554	24V drückend	230	385	2609	-	9,0 A
860551	230V-50/60Hz ziehend	220	400	4950	-	1,06 A
860552	230V-50/60Hz drückend	220	400	4950	-	1,06 A
860555	230/400V-50/60Hz 3FN ziehend	220	400	4615	-	0,39 A
860556	230/400V-50/60Hz 3FN drückend	220	400	4615	-	0,39 A
860557	hydraulisch ziehend	245	400	7050	-	1,5 kW
860558	hydraulisch drückend	245	400	7050	-	1,5 kW

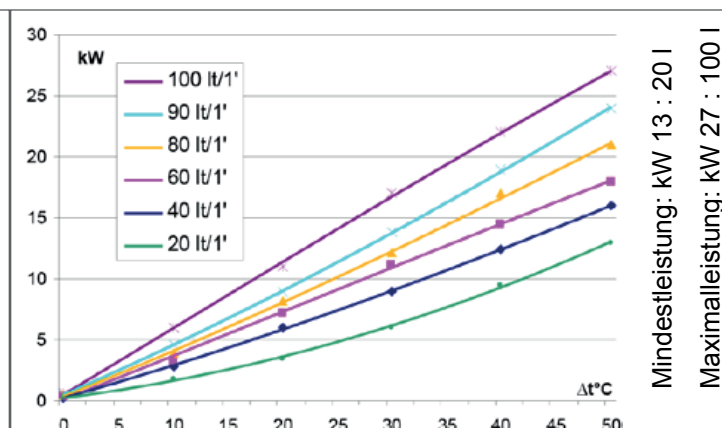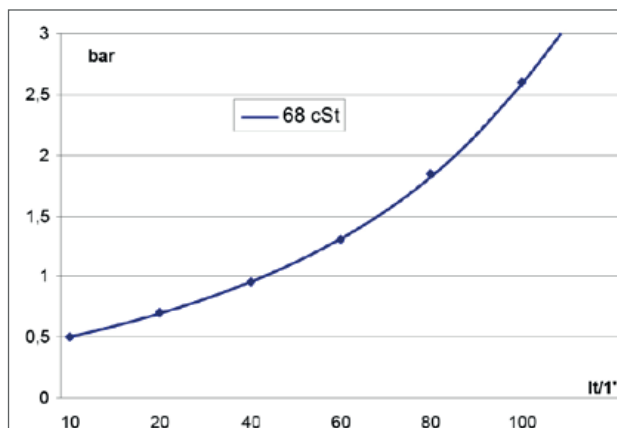


Ölkühler Serie GR



Modell GR 500 S

KÜHLER-RATH


Maße in mm

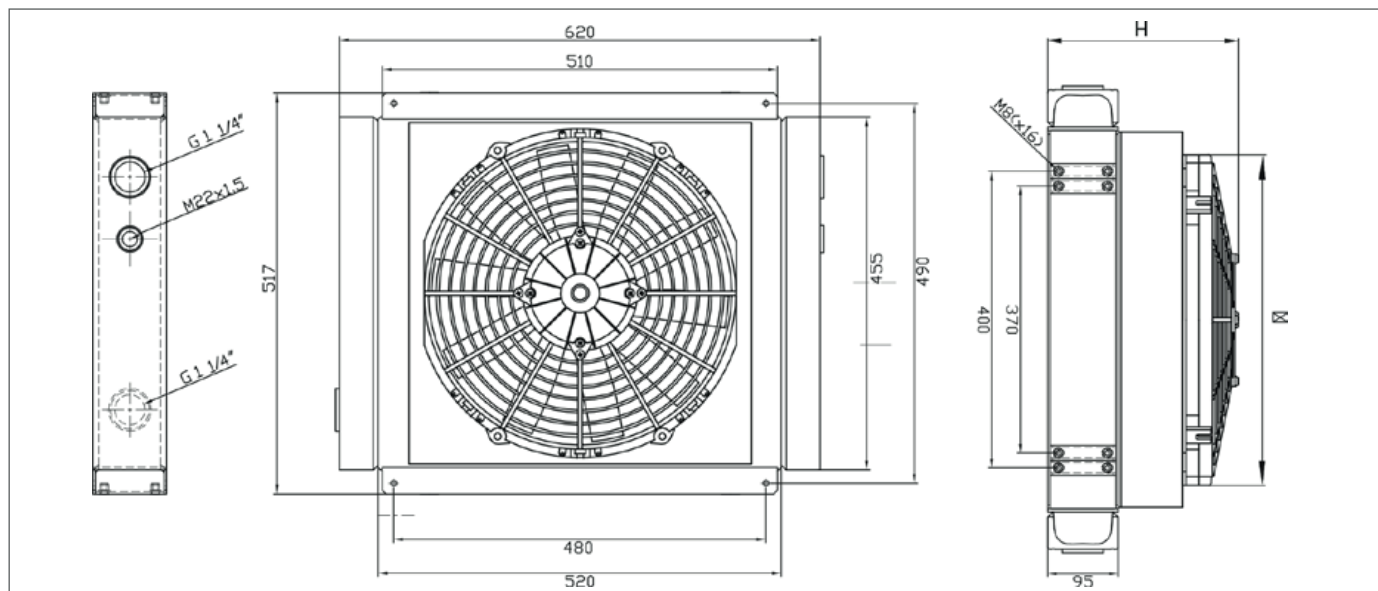

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m ³ /h):	Volumen l:	Leistungsaufnahme:
86063	nur Ölkühler	95	-	-	-	-
86063Z	12V ziehend	260	385	2212	-	16,0 A
86063D	12V drückend	260	385	2412	-	16,2 A
860633	24V ziehend	260	385	2577	-	9,3 A
860634	24V drückend	260	385	2609	-	9,0 A
860631	230V-50/60Hz ziehend	250	400	4950	-	1,06 A
860632	230V-50/60Hz drückend	250	400	4950	-	1,06 A
860635	230/400V-50/60Hz 3FN ziehend	250	400	4615	-	0,39 A
860636	230/400V-50/60Hz 3FN drückend	250	400	4615	-	0,39 A
860637	hydraulisch ziehend	270	400	7050	-	1,5 kW
860638	hydraulisch drückend	270	400	7050	-	1,5 kW

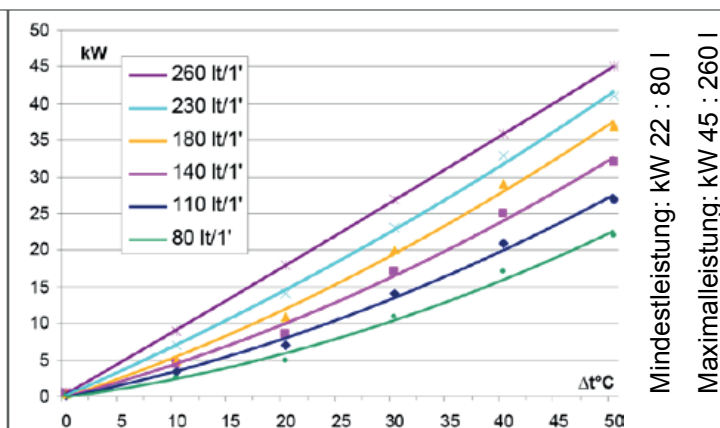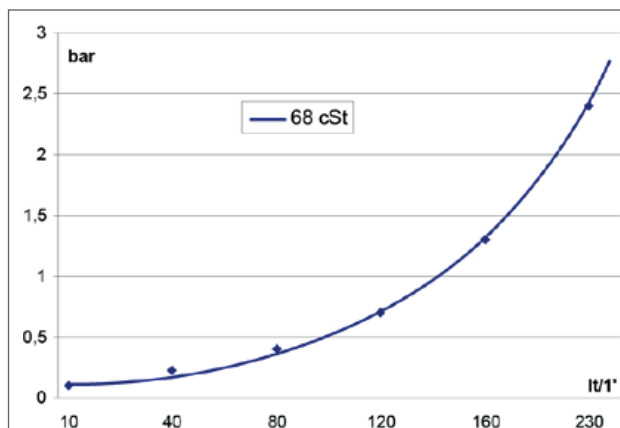


Ölkühler Serie GR



Modell GR 500 D

KÜHLER-RATH


Maße in mm

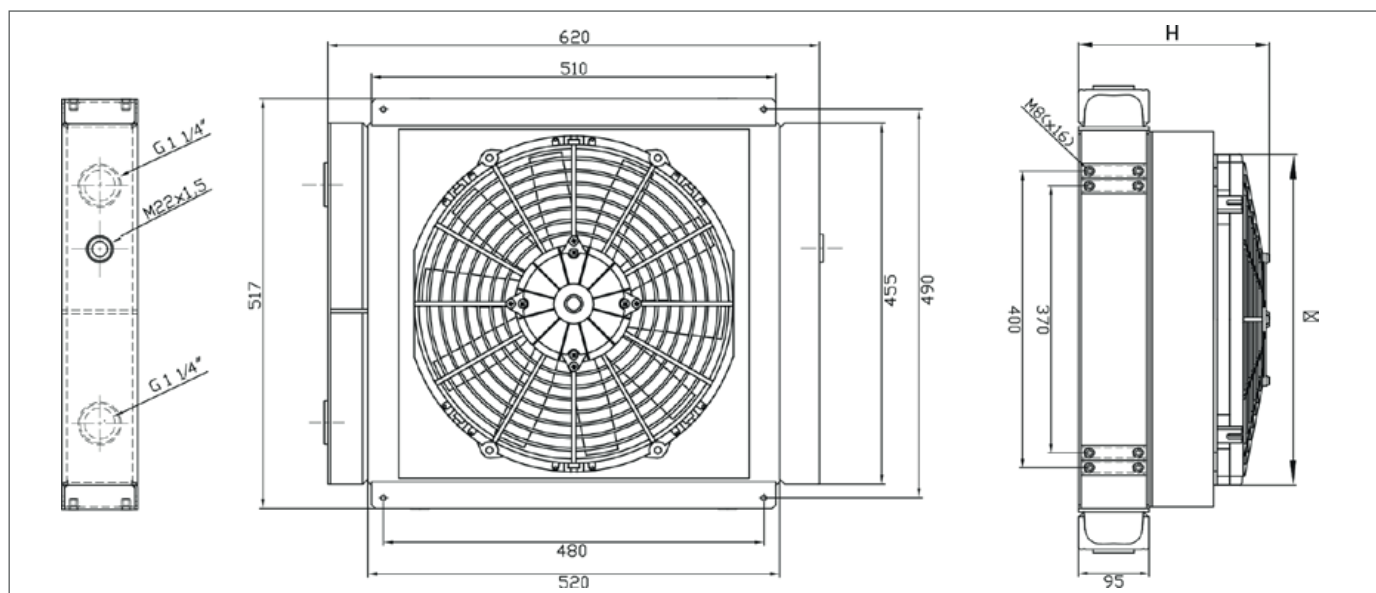

Artikelnummer:	Ausstattung:	Overall H:	Lüfterdurchmesser (mm):	Luftstrom (m ³ /h):	Volumen I:	Leistungsaufnahme:
86053	nur Ölkühler	95	-	-	-	-
86053Z	12V ziehend	260	385	2212	-	16,0 A
86053D	12V drückend	260	385	2412	-	16,2 A
860533	24V ziehend	260	385	2577	-	9,3 A
860534	24V drückend	260	385	2609	-	9,0 A
860531	230V-50/60Hz ziehend	250	400	4950	-	1,06 A
860532	230V-50/60Hz drückend	250	400	4950	-	1,06 A
860535	230/400V-50/60Hz 3FN ziehend	250	400	4615	-	0,39 A
860536	230/400V-50/60Hz 3FN drückend	250	400	4615	-	0,39 A
860537	hydraulisch ziehend	270	400	7050	-	1,5 kW
860538	hydraulisch drückend	270	400	7050	-	1,5 kW

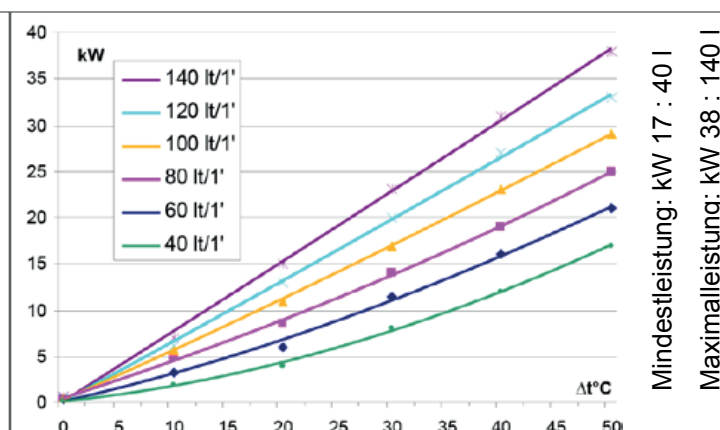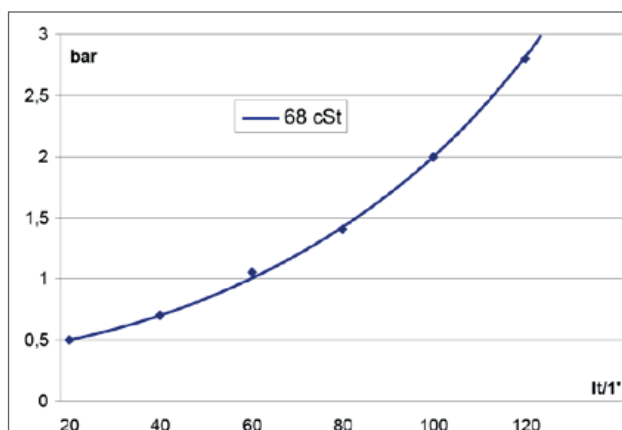

Mindestleistung: kW 17 : 40 I
Maximalleistung: kW 38 : 140 I

KÜHLER-RATH

Kontakt:

Willi Rath KG
Herzogenbuscherstr. 41
54292 Trier

Tel.: +49 (0) 651/270 76-0
Fax: +49 (0) 651/270 76-22

Öffnungszeiten:
Montag-Freitag 8-17 Uhr

www.kuehler-rath.de
info@kuehler-rath.de